



For solid wood flooring



Application example



SPAX MULTI Head




Fixing thread



SPAX 4CUT point



Flat countersunk head, SPAX T-STAR plus
With SPAX MULTI Head and SPAX 4CUT point, case hardened, slide-coated zinc yellow passivated A2L

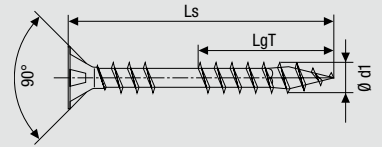

Dimensions [mm]				Packaging unit	SPAX No.
Thread Ø d1	Length total Ls	Length partial thread LgT	Bit size T-STAR plus T	SPAX BOX [pieces]	
4.5	50	21.5	20	500	0541020450505
	60	26.5	20	500	0541020450605
	70	31.5	20	500	0541020450705
	80	31.5	20	200	0541020450805

SPAX flooring screw

The **SPAX flooring screw** can be sunk cleanly and flush. In doing this, the **SPAX MULTI Head** effectively mills into wood and thanks to its recess **SPAX T-STAR plus T20** guarantees a high force transmission and a secure seating of the tool.


The fixing thread allows a solid and permanent connection of two wood components. It effectively reduces creaking caused in the floor structure. The **SPAX 4CUT point** effectively minimises wood splitting.

The special characteristics of the SPAX flooring screw:

- SPAX MULTI Head for flush sinking. Mills in wood.
- SPAX T-STAR plus T20 recess
- The fixing thread allows a solid and permanent connection of two wood components
- SPAX ground serrations
- SPAX 4CUT point



**Milling head,
SPAX T-STAR plus**
SPAX CUT point, case hardened,
slide-coated

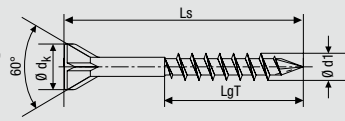

zinc yellow passivated A2L

Dimensions [mm]				Packaging unit	SPAX No.
Thread Ø d1	Length total Ls	Length partial thread LgT	Bit size T-STAR plus T	SPAX BOX [pieces]	
3.5	35	20	10	500	35703503203021
	45	29	10	500	35703503201021
	55	36	10	500	35703503202021

SPAX for solid wood flooring

The ideal screw for laying solid wood flooring. Thanks to the special screw geometry including the SPAX CUT point material splitting is reduced effectively.

The characteristic screw point ensures an immediate grip, cutting ribs facilitate sinking, and the small 60° milling head allows the SPAX to pull into the material in a particularly easy way.

Perfect connection of tongue and groove.

The special characteristics of the SPAX for solid wood flooring:

- Small 60° milling head
- SPAX T-STAR plus T10 recess
- Partial thread
- SPAX typical ground serrations
- SPAX CUT point
- Includes 1 BIT SPAX T-STAR plus T10 per SPAX Box

NEW!



Application example



Small 60° milling head



SPAX CUT point





SPAX International GmbH & Co. KG

ALTENLOH, BRINCK & CO - GRUPPE

KÖLNER STRASSE 71-77 · D-58256 ENNEPetal · GERMANY

TEL + 49-(0) 23 33-799-0 · FAX + 49-(0) 23 33-799-199

info@spax.com · www.spax.com