

Lets face it, gloves or no gloves
barbed wire isn't designed to be tied

That's why at Gripple we have developed a new wire joiner
specifically for use with high tensile barbed wire.

400 kg | 880 lbs

Working Load

1.57 - 2.00 mm


Wire Range

15.5 - 14 swg

Wire Gauge

45 g | 0.1 lb

Product Weight

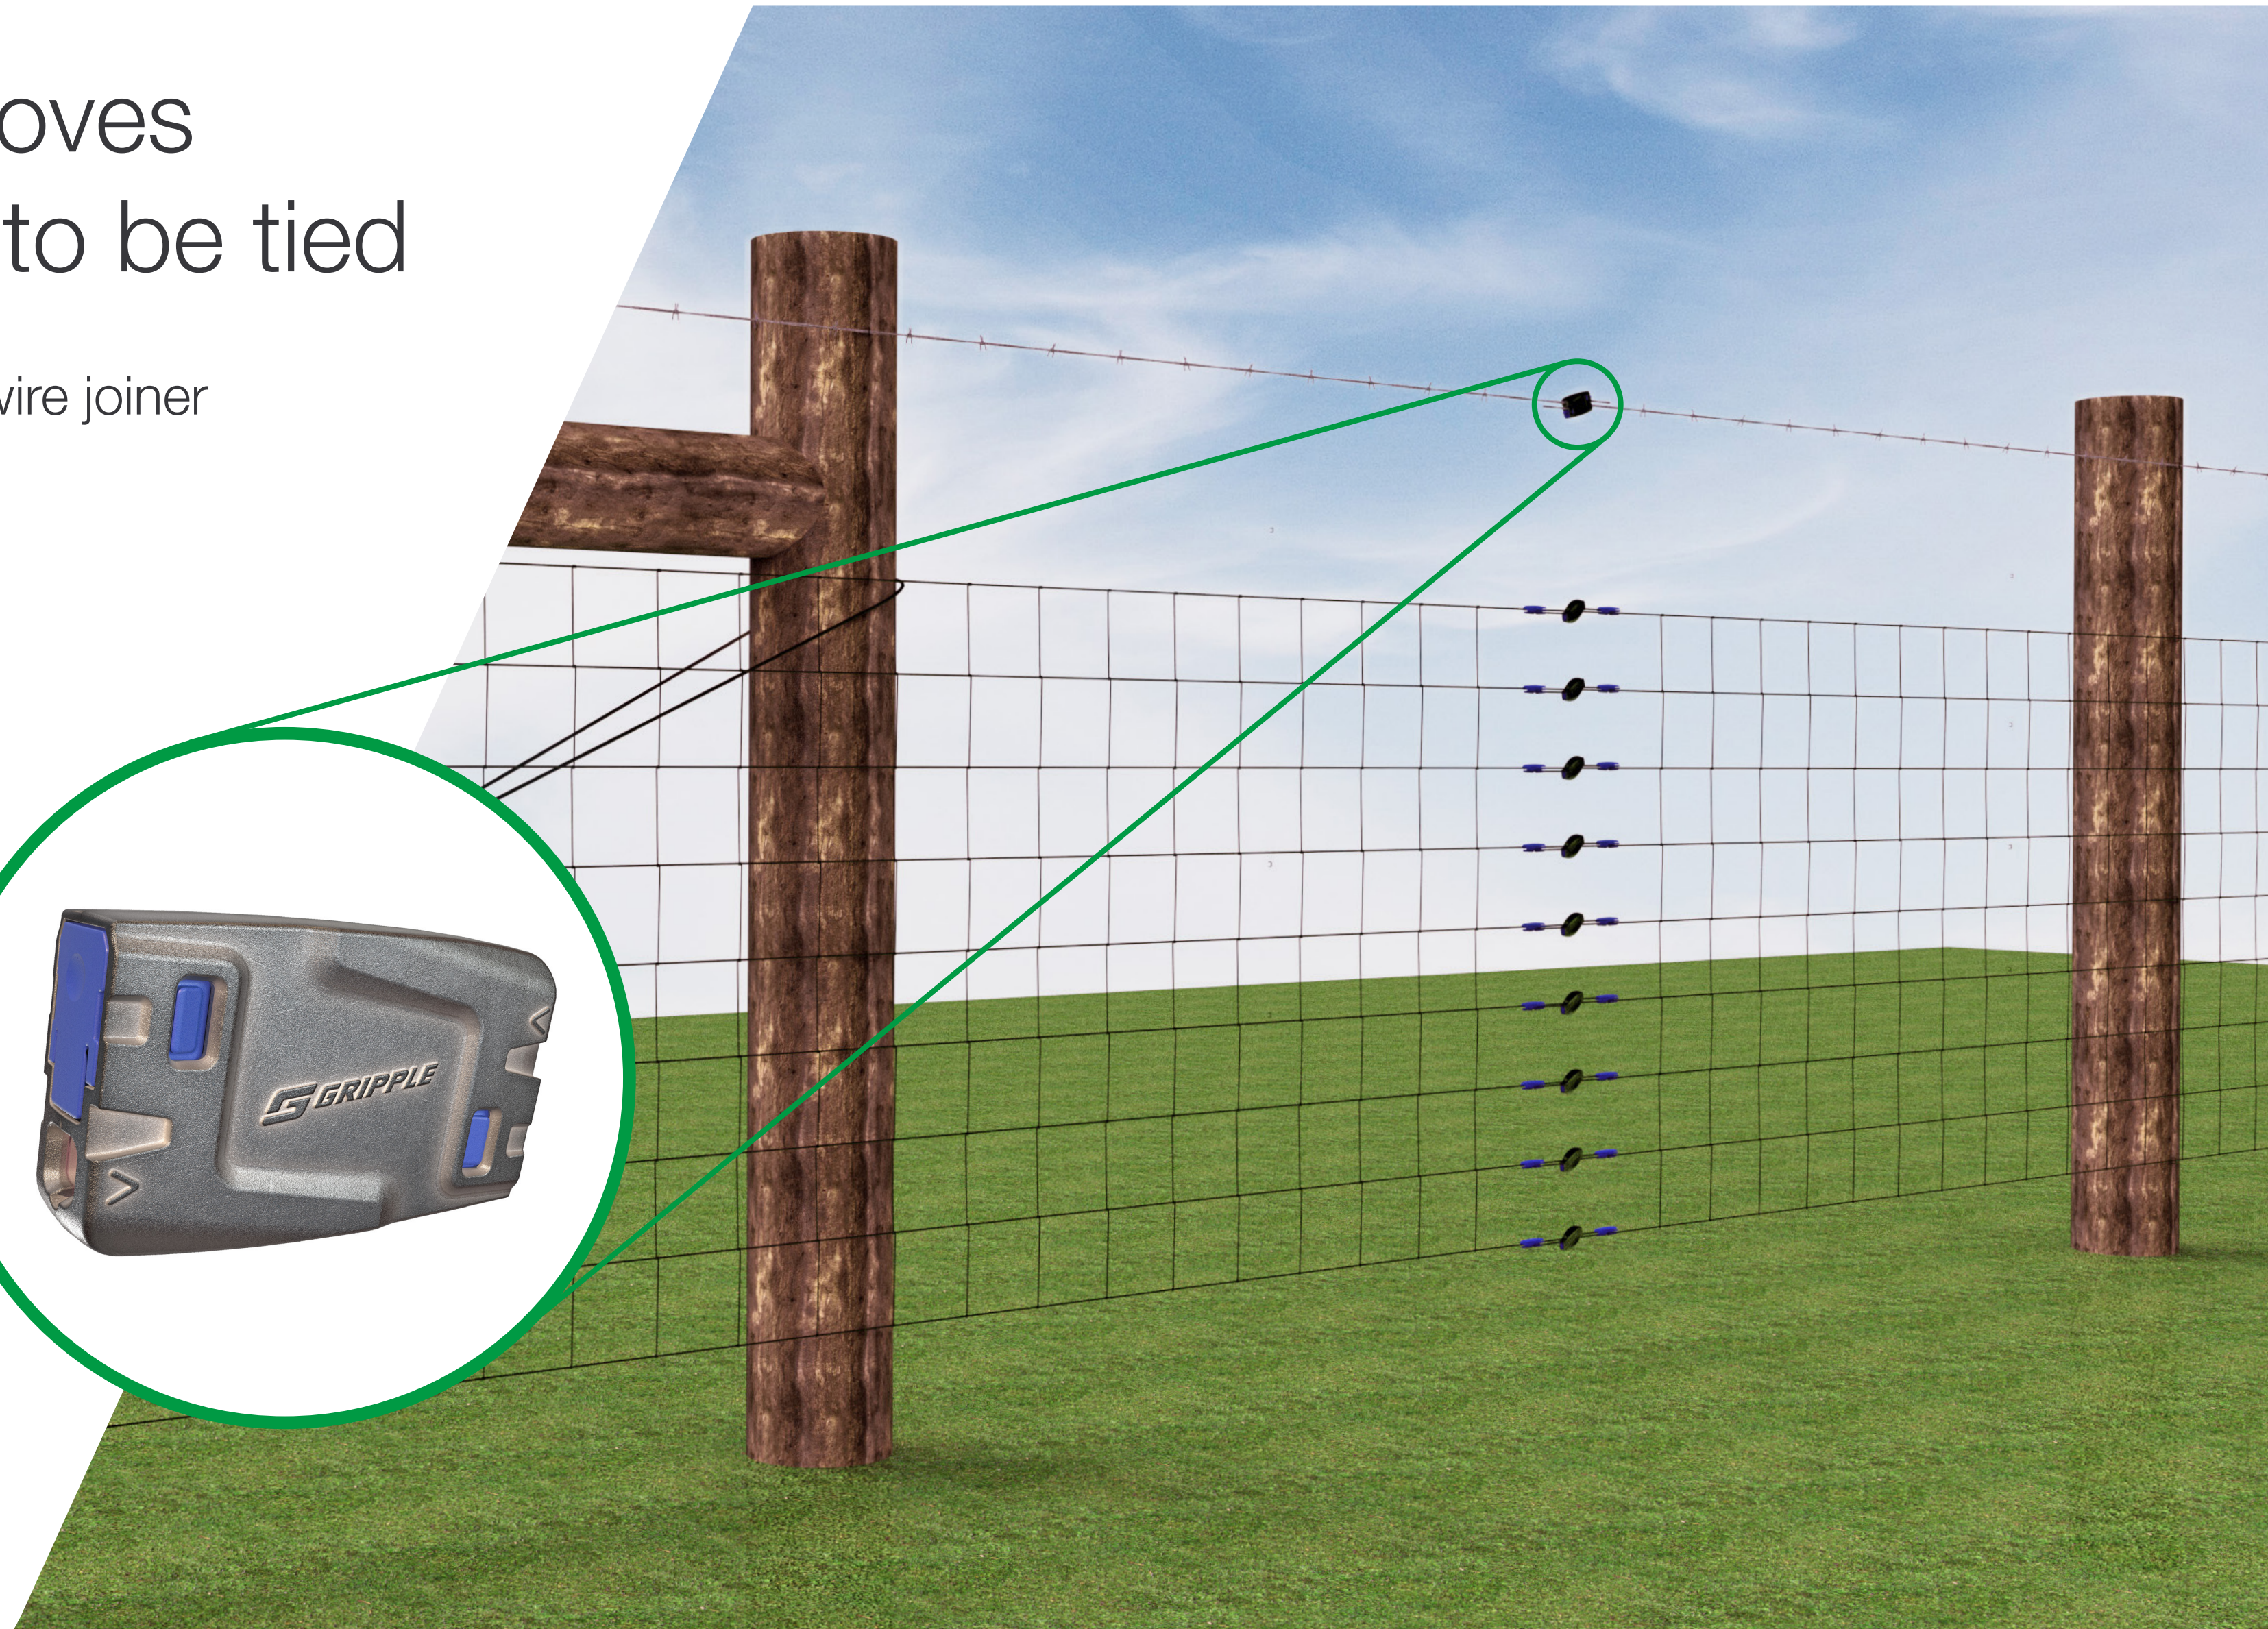

The Gripple Barbed High Tensile joiner has been intentionally designed to grip the unique shape of barbed wire.

It is fast to install, simple to use, and thanks to the new corrosion resistant ceramic wedge, you can walk away with confidence your wire joint will last as long as your fence.

Compatible with all wire sizes from 1.57 mm - 2.00 mm | 2 x 15.5 swg - 2 x 14 swg, the new Barbed High Tensile joiner is ideal for installation or fencing repair and is available at your local agricultural or fencing retailer.

Stronger than a traditional knot

Up to 16% stronger than a traditional wire knot

Designed for high tensile wire

New patented technology specifically designed for use with high tensile barbed wire

Easy to install

Join or repair high tensile barbed wire in seconds with audible engagement for added confidence

Long lasting

Made from corrosion resistant materials, designed to outlast your fence

Compatible

Use with 1.57 mm to 2.00 mm | 2 x 15.5 swg - 2 x 14 swg wire

